
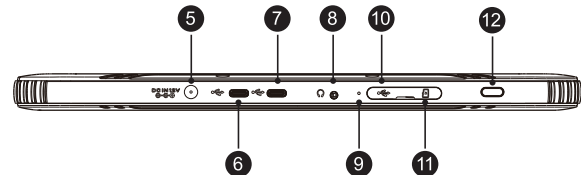



Thank you for purchasing this OTOFIX D1 Max diagnostics tool. This tool is manufactured to a high standard and will provide years of trouble-free performance when used in accordance with these instructions and properly maintained.

OTOFIX D1 Max

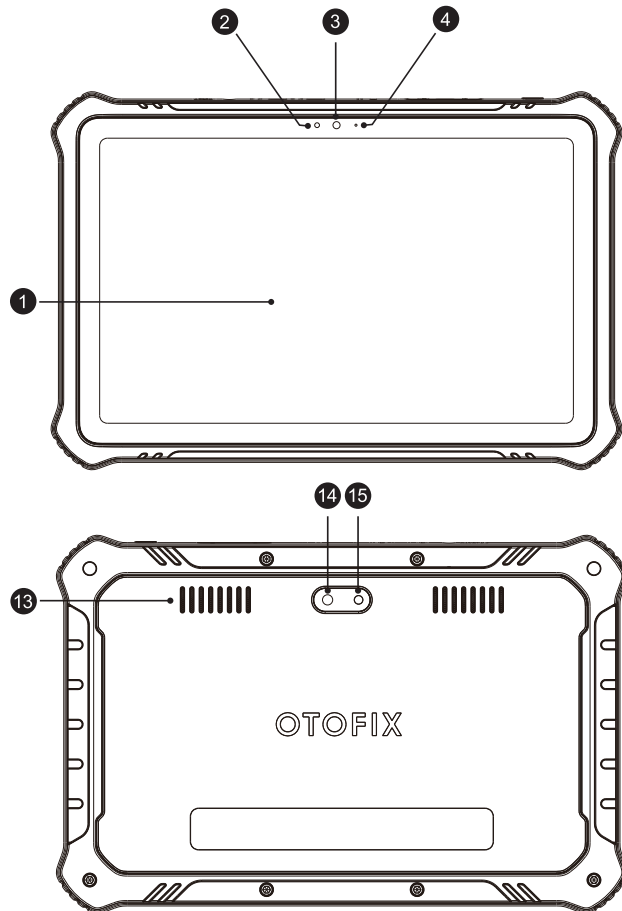

1. 10.4-inch Touchscreen
2. Ambient Light Sensor — detects ambient brightness
3. Front Camera
4. Power LED
5. DC Power Supply Input Port
6. USB Port
7. USB Port
8. Headphone Jack
9. Microphone
10. Mini USB Port
11. SD Card Slot
12. Power/Lock Button — turns the device on & off with long press, or locks the screen with short press
13. Speaker
14. Rear Camera
15. Camera Flash

OTOFIX V1

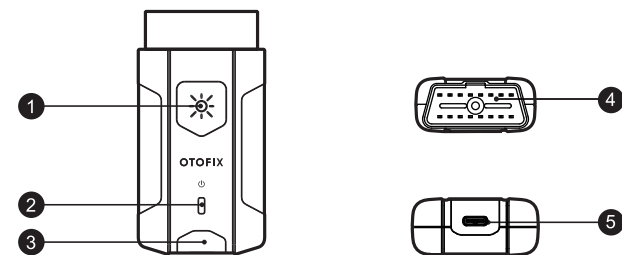

1. Flashlight Button
2. Power LED
3. Vehicle/Connection LED
4. Vehicle Data Connector (16-pin)
5. USB Port

OTOFIX V1 Description


LED	Color	Description
Power LED	Yellow	VCI is powered on and performing self-check.
	Green	VCI is ready for use.
	Flashing Red	Firmware is upgrading.
Vehicle/Connection LED	Green	<ul style="list-style-type: none"> • Solid Green: VCI is connected via USB cable. • Flashing Green: VCI is communicating via USB cable.
	Blue	<ul style="list-style-type: none"> • Solid Blue: VCI is connected via Bluetooth. • Flashing Blue: VCI is communicating via Bluetooth.

Getting Started




IMPORTANT: Before operating or maintaining this unit, please read the Quick Reference Guide carefully, paying extra attention to the safety warnings and precautions. Failure to use this unit correctly may cause damage and/or personal injury and will void the product warranty.

1

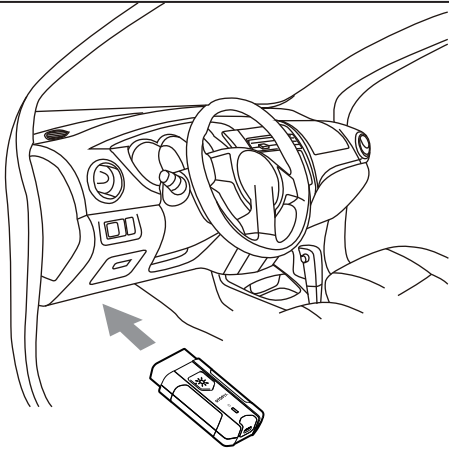


- Insert the V1 into the OBDII port, which is generally located under the vehicle dashboard.

2

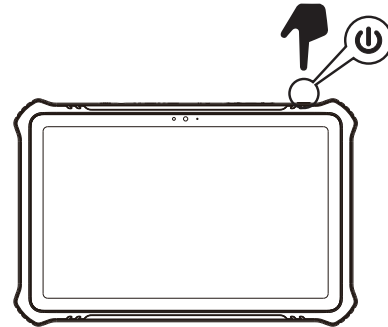

- Long press the **Power/Lock** button to power up the diagnostics tablet. Ensure the tablet has a charged battery or is connected to the supplied DC power supply.


3

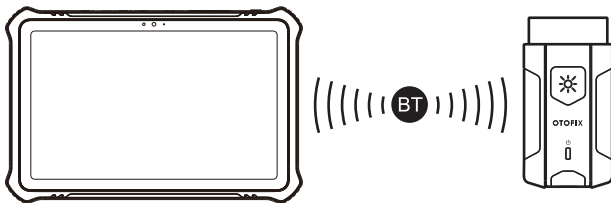

- Pair up the diagnostics tablet with the V1 via Bluetooth to establish a communication link.


NOTE: The diagnostics tablet and the V1 are configured to automatically synchronize with each other on the initial use, therefore, the pairing is not required.

OR

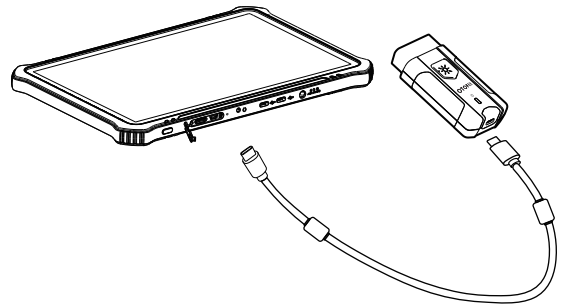

- Pair up the diagnostics tablet with the V1 via USB to establish a communication link.

4

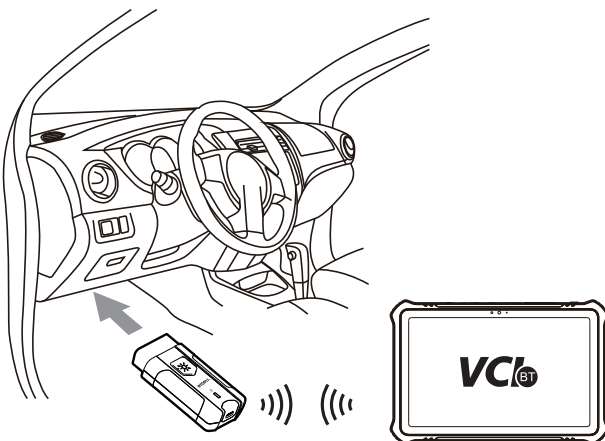

- When the V1 is properly connected to the vehicle and the diagnostics tablet, the VCI status button at the bottom bar on the screen displays a green badge. This indicates your diagnostics tablet is ready to start vehicle diagnosis.